

**GRIDDLES & BROILERS****VULCAN****VSP SERIES  
STOCKPOT RANGES****Model VSP100**

- ☐ **VSP100** One section, 18" wide x 24.5" deep  
☐ **VSP200F** Two sections, 18" wide x 49" deep

**STANDARD FEATURES**

- Stainless steel front and sides.
- Heavy cast iron top grate(s).
- Two concentric 55,000 BTU/hr. ring-type burners per 18" section; 110,000 BTU/hr. input per section.
- Standing pilot ignition system.
- Two infinite heat control valves per section.
- Heat shield to protect control valves.
- 3/4" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

**SPECIFICATIONS****Exterior Dimensions:**

18" wide x \_\_\_\_\_" deep x 22½" to 24" working height on adjustable legs

CSA design certified. NSF listed.

**SPECIFY TYPE OF GAS WHEN ORDERING.**  
**SPECIFY ALTITUDE WHEN ABOVE 3,999 FT.**

**VULCAN**

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602



## VSP SERIES STOCKPOT RANGES

### INSTALLATION REQUIREMENTS:





1. A gas pressure regulator sized for this unit was included.  
Natural Gas 5" W.C.  
Propane Gas 10" W.C.
2. Gas line connecting to appliance must be  $\frac{3}{4}$ " diameter or larger.  
If flexible connectors are used, the inside diameter must be the same as the  $\frac{3}{4}$ " pipe.
3. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169, www.NFPA.org. When writing refer to NFPA No. 96.
4. These units are manufactured for installation in accordance with National Fuel Gas Code, ANSI-Z223.1/NFPA #54 (latest edition). Copies may be obtained from The American Gas Association,

Accredited Standards Committee Z223 @ 400N. Capital St. NW, Washington, DC 20001, or the Secretary Standards Council, NFPA, 1 Batterymarch Park, Quincy, MA 02169-7471.

#### NOTE: In the Commonwealth of Massachusetts

All gas appliances vented through a ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.

- |                |             |                 |
|----------------|-------------|-----------------|
| 5. Clearances: | Combustible | Non-Combustible |
| Rear           | 24"         | 4"              |
| Sides          | 18"         | 0"              |
6. This appliance is manufactured for commercial installation only and is not intended for home use.

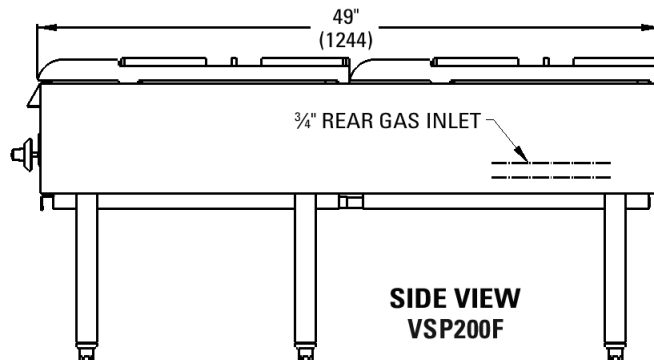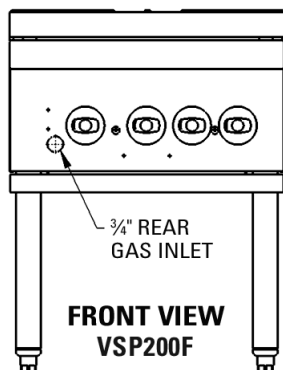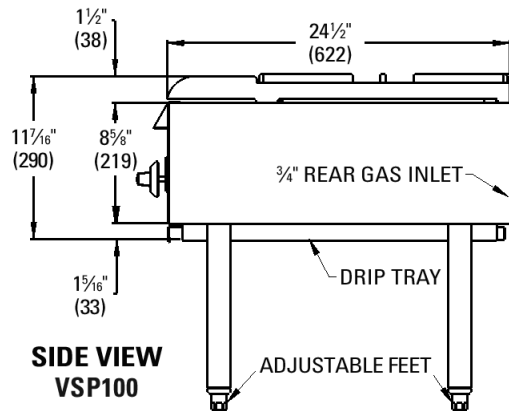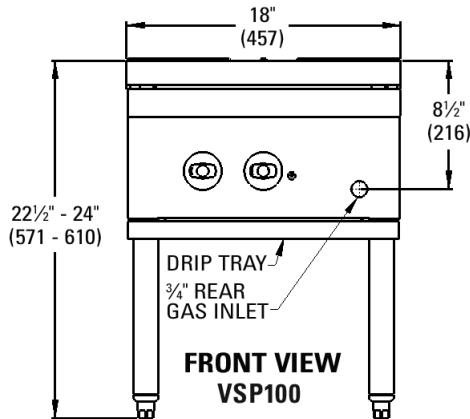

| MODEL   | TOTAL BTU/HR. | WIDTH | DEPTH   | HEIGHT         | APPROX. SHIP WT. (LB/KG) |
|---------|---------------|-------|---------|----------------|--------------------------|
| VSP100  | 110,000       | 18"   | 24 1/2" | 22 1/2" to 24" | 145/66                   |
| VSP200F | 220,000       | 18"   | 49"     | 22 1/2" to 24" | 290/131                  |



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.